


# SB212

## Dual 12" subwoofer

### Features

- Passive port vented subwoofer with 2x12" transducers
- Compact enclosure
- High class transducers
- Integrated rigging points

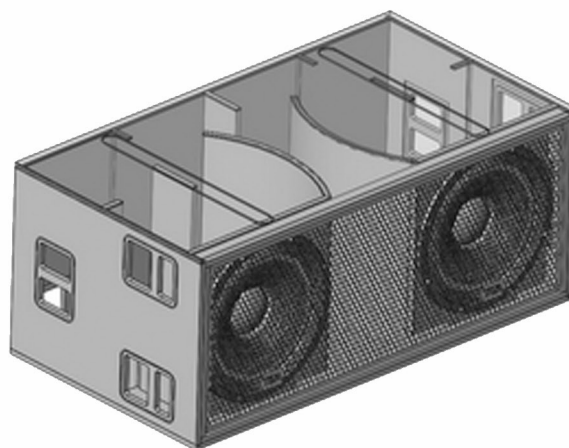

### Technical Datasheet

---

Frequency Range (-10 dB):	32 Hz - 500 Hz
Max. SPL (Program power, 1 m):	137.5 dB SPL @ free field
Power Handling (cont./prog./peak):	1800/2800/12000 W
Nominal Impedance:	4 Ohms
Sensitivity (1W@1m):	103 dB
Tuning frequency:	42 Hz

### Components

---

Transducers:	Dual 12" transducers
Enclosure:	Water resistant painted multilayered plywood
Termination:	Neutrik 4-pin Speakon

### Physical

---

Color:	Black or RAL-painted
Dimensions (H x W x D):	365 mm x 1116 mm x 530 mm
Net Weight:	49 kg

DiGiS Группа Компаний  
115230, Москва  
1-й Нагатинский проезд, д. 10 стр.1  
Тел.: (495) 787-8737  
info@digis.ru

[www.digis.ru](http://www.digis.ru)

**DI/AUDIO**