

Eliva

Compact 2-way Line Array System


Features

2-way line array loudspeaker system with 2x6.5" MF-transducers and 1x1.75" waveguide loaded HF-driver

Ultra compact

E.A.S.E GLL-files available

Integrated suspension system

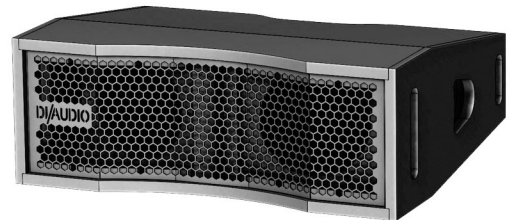

Technical Datasheet

Frequency Range (-10 dB):	68 Hz - 20 kHz
Max. SPL (Program power, 1 m):	133 dB SPL
Power Handling (cont./prog./peak):	260/520/1040 W
Nominal Impedance:	16 Ohms
Sensitivity (1W@1m):	LF: 93 dB, HF: 110 dB
Nominal Coverage (H x V):	120 ° x 15°

Components

Transducers:	Dual 6,5 inch LF transducers, single 1,75 inches waveguide-loaded compression HF
Enclosure:	Water resistant painted multilayered plywood
Termination:	Neutrik 4-pin Speakon

Physical

Color:	Black or RAL-painted
Dimensions (H x W x D):	202 mm x 540 mm x 416 mm
Net Weight:	18 kg

DiGiS Группа Компаний
115230, Москва
1-й Нагатинский проезд, д. 10 стр.1
Тел.: (495) 787-8737
info@digis.ru

www.digis.ru

DI/AUDIO