



BenQ DLP Projector

TK710

Feature High Light

- * Great Native FOFO Contrast of min. 1350:1
- * 1.3x big zoom with 10% lens shift for easy installation
- * The wider color gamut coverage rate of Rec.709 95%
- * 2K resolution for better gaming experience

Display

Projection System	DLP
Native Resolution	0.65" 4K UHD
Brightness	MKT 3200lm
Native Contrast Ratio (FOFO)	min. 1350:1 (Bright mode)
Display Color	1.07 Billion Colors
Rec.709 Coverage	95%
Native Aspect Ratio	16:09
Light Source	Laser + LED
Light Source Life (Normal/Eco)*	20000 / 30000 hours

Optical

Throw Ratio	1.15~1.5
Zoom Ratio	1.3x
Lens	F/#=2.48~2.78, F=16.88~21.88
Lens Shift	10%
Keystone Adjustment	3D keystone, Vertical & Horizontal & Rotation ± 30 degrees
Projection Offset	(105%~115%)± 2.5%
Image Size	Wide:60"~150", Tele:60"~115"

Picture

Picture Mode	Bright / Living room / RPG / FPS / Cinema / User / (3D) / (HDR-RPG) / (HDR-FPS) / (HDR10) / (HDR-User) / (HLG)
--------------	--

Audio

Speaker	5W treVolo x1
---------	---------------

Compatibility

Resolution Support	VGA(640 x 480) to 4K UHD(3840x2160)
Horizontal Frequency	15K~135KHz
Vertical Scan Rate	23~240Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p, 2160p

Power

Power Consumption	275 W (Max); < 0.5 W (Standby)
Standby Power Consumption	< 0.5W
Power Supply	AC 100 to 240 V, 50/60 Hz

Dimension and Weight

Product Dimensions (WxHxD)	304.2 x 232.5 x 112.4mm (include Adj foot)
Product Weight	3.0 Kg +/- 100g

Operation Condition

Acoustic Noise (Normal/Eco2/Eco) (dB)	Normal: 34dBA(typ.)(Bright) Normal: 31 dBA(typ.)(others mode)-TBD by EVT2 Eco: 28dBA(typ.) *Eco is Normal 70% light source power *noise:XPR on+1 Dba *Noise without SWF
Operating Temperature	0~40°C

Accessories

Accessories (Standard)	Power Cord Quick Start Guide User Manual E-edition Remote Control Warranty Card Regulatory Statements
Accessories (Optional)	NA

OSD


On Screen Display Language	English / Français / Deutsch / Italiano / Español / Русский / 繁體中文 / 简体中文 / 日本語 / 한국어 / Svenska / Nederlands / Türkçe / Čeština / Português / ភាសាខ្មែរ / Polski / Norsk / suomi / Indonesian / العربية / हिन्दी (22 Languages)
----------------------------	---

Environment Notice

- *LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications.
- *All related Optical Value is measure by Standard Lens.
- * The Contrast is measure by Full On Full Off standard.




Connectivity

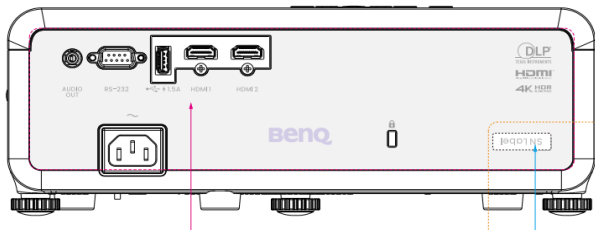

	Quantity
1 HDMI(HDCP2.2)	2
2 USB Type A (1A power supply)	1
3 RS232	1
4 Audio Out	1

Dimension & Installation

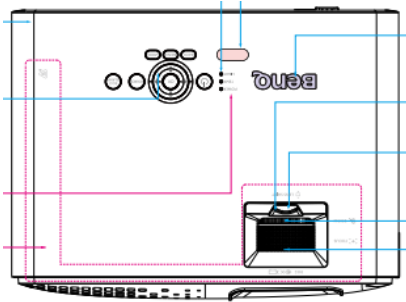

304.2 x 232.5 x112.4mm (include Adj foot)
3.0 Kg +/- 100g